

let the *light*
change

WEVER & DUCRÉ



FLEX
FY

with your *ideas*



LECA
p. 13

TAPIS SOFT
p. 31



MATCH
p. 19



TRACE
p. 21

CEILING
SURFACE



CENO
11



LECA
13



MATCH
15

CEILING
SUSPENDED



FINLIN
17



MATCH
19



TRACE
21



SOLLI
23

WALL
SURFACE



FINLIN
25



MATCH
27



TRACE SLIM
29



TAPIS SOFT
31



WITH FLEXYFY THE LIGHTING IS THERE WHERE YOU NEED IT

Wer wechselnde Ausstellungen plant oder im Co-Working-Space öfter mal Platz für neue Kollegen braucht, möchte auch in Sachen Beleuchtung flexibel bleiben. Wie's klappt? Mit den leitfähigen Wand- und Deckenpaneelen von FLEXYFY, die sich mühelos in jeden Raum integrieren lassen. Das Ergebnis: Flexibel positionierbare Leuchten, die das Licht genau dahin bringen, wo Sie es brauchen. Ohne fixe Anschlüsse und ohne nervigen Kabelsalat. Funktioniert natürlich auch mit anderen elektronischen Geräten, die sich mit dem magnetischen System immer wieder neu arrangieren lassen.

Anyone who plans changing exhibitions or often needs space for new colleagues in a co-working space also wants to remain flexible when it comes to lighting. How does this work? BY using the conductive wall system from FLEXYFY, which can be effortlessly integrated into any room. The result: Flexibly positionable luminaries that put the light exactly where you need it. Without fixed connections and without annoying cable clutter. Of course, it also works with other electronic devices that can be rearranged again and again with the magnetic system.

A little more to the *right*

WHERE IS THE POWER OUTLET? NO NEED TO ASK THIS QUESTION.


Keine Nägel, keine sichtbaren Kabel und auch keine Handwerker, bei denen man oft monatelang auf einen Termin warten muss – FLEXYFY ist so einfach konzipiert, dass Sie die Montage auch locker selbst hinkommen. Und das ganz unabhängig vom Stromauslass. Denn das leitfähige Vlies im inneren der Wandpanele und im Power-Layer System verteilt den Strom gleichmäßig über Wand- und Decke. So können Designs schnell gewechselt und flexibel an das Raumkonzept angepasst werden.

No nails, no visible cables and no tradesmen, with whom you often have to wait months for an appointment – FLEXYFY is designed to be ever so simple that you can easily assemble it on your own. And this is completely independent of the power outlet. This is because the conductive fleece inside the wall panel and in the Power-Layer system distributes the current evenly across the wall and ceiling. This means that designs can be changed quickly and flexibly adapted to the room concept



“With FLEXYFY, the lighting in a room can be *redesigned* again and again.”

ANJA UND CHRISTIAN *Founder of FLEXYFY*

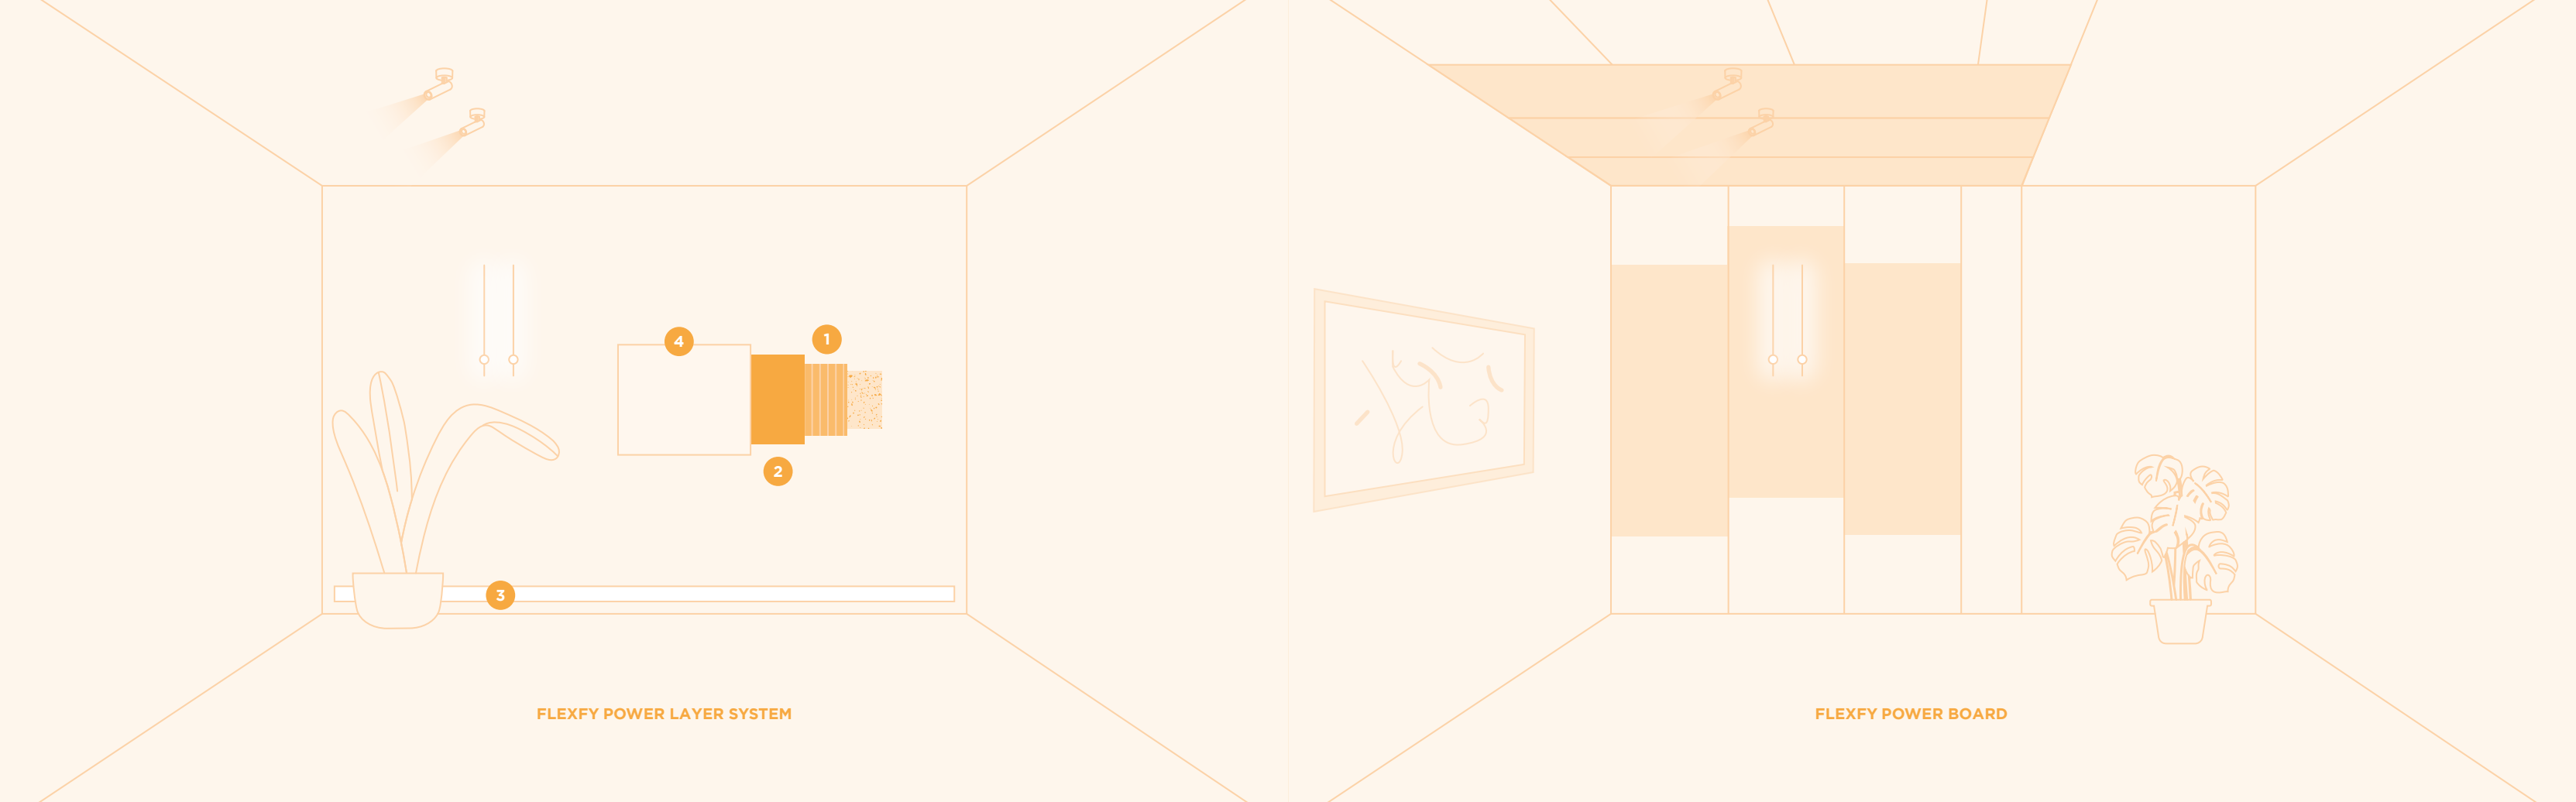

1 ELECTRICALLY CONDUCTIVE FLEECE

2 MAGNETIC PLASTER

3 CONTACT BAR FOR CENTRAL POWER SUPPLY (DC)

4 DECORATIVE SURFACES, E.G., PAINT

**FLEXYFY POWER
LED PLUG**

non dim | max. 14W | 48V | plastic
IP20 0.02kg CE



CODE

915111D0

**FLEXYFY
LED PLUG**

wireless dim | max. 14W | 48V | plastic
IP20 0.02kg CE



CODE

915112B0

FLEXYFY WALL PLATE



L/H 600x2000mm

FLEXYFY REMOTE DRIVER

220-240VAC | 48V

350W

500W

FLEXYFY DIN RAIL DRIVER

220-240VAC | 48V

240W

480W

**FLEXYFY CONNECTION
CABLE**

130mm

GET IN CONTACT WITH FLEXYFY

FLEXYFY GmbH | Heinz-Friedrich-Straße 7
64380 Roßdorf | hello@flexfy.io



GOOD THAT YOUR ROOMS CAN BE ADAPTED
SPONTANEOUSLY WITH FLEXFY

Change of *plans*?

Gerade in Co-Working-Spaces, Meetingräumen oder Restaurants ist es oft schwer, verschiedene Anwendungen wie Beleuchtung, Fernseher oder Regale an die ständig wechselnden Bedingungen anzupassen. Die gute Nachricht: Mit FLEXFY gelingt der Switch von warmem Stimmungslicht zu hellem Arbeitslicht oder das Umstellen von Geräten mit nur wenigen Handgriffen. Denn alle Elemente sind magnetisch mit dem leitfähigen Wand- und Deckensystem verbunden und können so jederzeit umpositioniert werden. Sollte sich also der Plan mal spontan ändern – Don't panic!

Especially in co-working spaces, meeting rooms or restaurants, it is often difficult to adapt various applications such as lighting, televisions or shelving to the constantly changing conditions. The good news: With FLEXFY, you can switch from warm mood lighting to bright task lighting or change devices in just a few simple steps. This is because all elements are magnetically connected to the conductive wall and ceiling system and can therefore be repositioned any time you like. So if the plan changes spontaneously – don't panic!






CENO

Ceiling surface

WORKS WITH

FLEX
FY



1.0

LED COB 7W
aluminium | plastic
FLEXFY compatible

IP20 0°-90°/350° 31° SDCM2 L70/55K 0.17kg

2700K | CRI >90 | 470lm

CODE

	17666FW3
	17666FBM3
	17666FB3



OPTIONAL

honeycomb louver

CODE

	90051131
--	----------

ALWAYS USE

FLEXFY LED plug

CODE

non dim	915111D0
dim	915112B0




LECA

Ceiling surface / Wall surface

WORKS WITH

FLEX
FY



1.0

LED COB 7W
aluminium | plastic
FLEXFY compatible

IP20 0°-90°/350° 31° SDCM2 L80/50K 0.17kg

2700K | CRI >90 | 585lm



OPTIONAL

honeycomb louver



CODE

90051131

CODE

18826FW3

18826FQ3

18826FB3

ALWAYS USE

FLEXFY LED plug

CODE

non dim

915111D0

dim

915112B0




MATCH

Ceiling surface / Wall surface

WORKS WITH

FLEX
FY



1.0

LED COB 7W
aluminium | plastic
FLEXFY compatible

IP20 0°-90°/350° 30° SDCM2 L80/50K 0.34kg

2700K | CRI >90 | 535lm

CODE	
	17715FW3
	17715FBL3
	17715FB3

ALWAYS USE

FLEXFY LED plug

CODE	
 non dim	915111D0
 dim	915112B0




FINLIN

Ceiling suspended

WORKS WITH

FLEX
FY



2.0

LED PCB 5W
aluminium | plastic | opal PMMA
diffuser | FLEXFY compatible

IP20 SDCM3 L80/50K 0.34kg


2700K | CRI >90 | 655lm

	CODE
	27028FB3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0



3.0

LED PCB 9W
aluminium | plastic | opal PMMA
diffuser | FLEXFY compatible

IP20 SDCM3 L80/50K 0.38kg

2700K | CRI >90 | 870lm

	CODE
	27038FB3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0



PRIVATE RESIDENCE NETHERLANDS




white fixtures with white cable/base
other fixtures with black cable/base
more colour combinations on request

MATCH

Ceiling suspended

WORKS WITH

FLEX
FY



3.0

LED COB 7W
aluminium
FLEXFY compatible

IP20 54° SDCM2 L80/50K 0.21kg


2700K | CRI >90 | 490lm

	CODE
	27927FW3
	27927FB3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	91511D0
dim	915112B0



5.0

LED COB 7W
aluminium
FLEXFY compatible

IP20 54° SDCM2 L80/50K 0.31kg

2700K | CRI >90 | 490lm

	CODE
	27937FW3
	27937FB3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	91511D0
dim	915112B0




TRACE

Ceiling suspended

WORKS WITH

FLEX
FY



1.1

LED COB 7W
aluminium
FLEXFY compatible

IP20 33° SDCM2 L80|50K 0.28kg


2700K | CRI >90 | 420lm

CODE
25316FBL3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0



1.2

LED COB 7W
aluminium
FLEXFY compatible

IP20 33° SDCM2 L80|50K 0.37kg

2700K | CRI >90 | 420lm

CODE
25326FBL3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0




SOLLI

Ceiling suspended

WORKS WITH

FLEX
FY



1.0

LED LED COB 7W
aluminium | black cable
artisanal Italian hand blown glass
FLEXFY compatible

IP20 SDCM2 L80|50K 0.45kg

2700K | CRI >90 | 360lm

CODE	
	23828FFD3
	23828FTD3
	23828FWB3

ALWAYS USE

FLEXFY LED plug

CODE	
 non dim	915111D0
 dim	915112B0





MATCH

Wall surface

WORKS WITH

FLEX
FY

162 38 600 ø26

2.0

LED COB 8W
aluminium | plastic
FLEXFY compatible

IP20 23° SDCM2 L80|50K 0.38kg

2700K | CRI >90 | 2x335lm

	CODE
	37725FW3
	37725FBL3
	37725FB3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0

162 38 400 ø26

2.1

LED COB 8W
aluminium | plastic
FLEXFY compatible

IP20 23° SDCM2 L80|50K 0.29kg

2700K | CRI >90 | 2x335lm


	CODE
	37715FW3
	37715FBL3
	37715FB3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0

WEVER & DUCRÉ 26 – 27

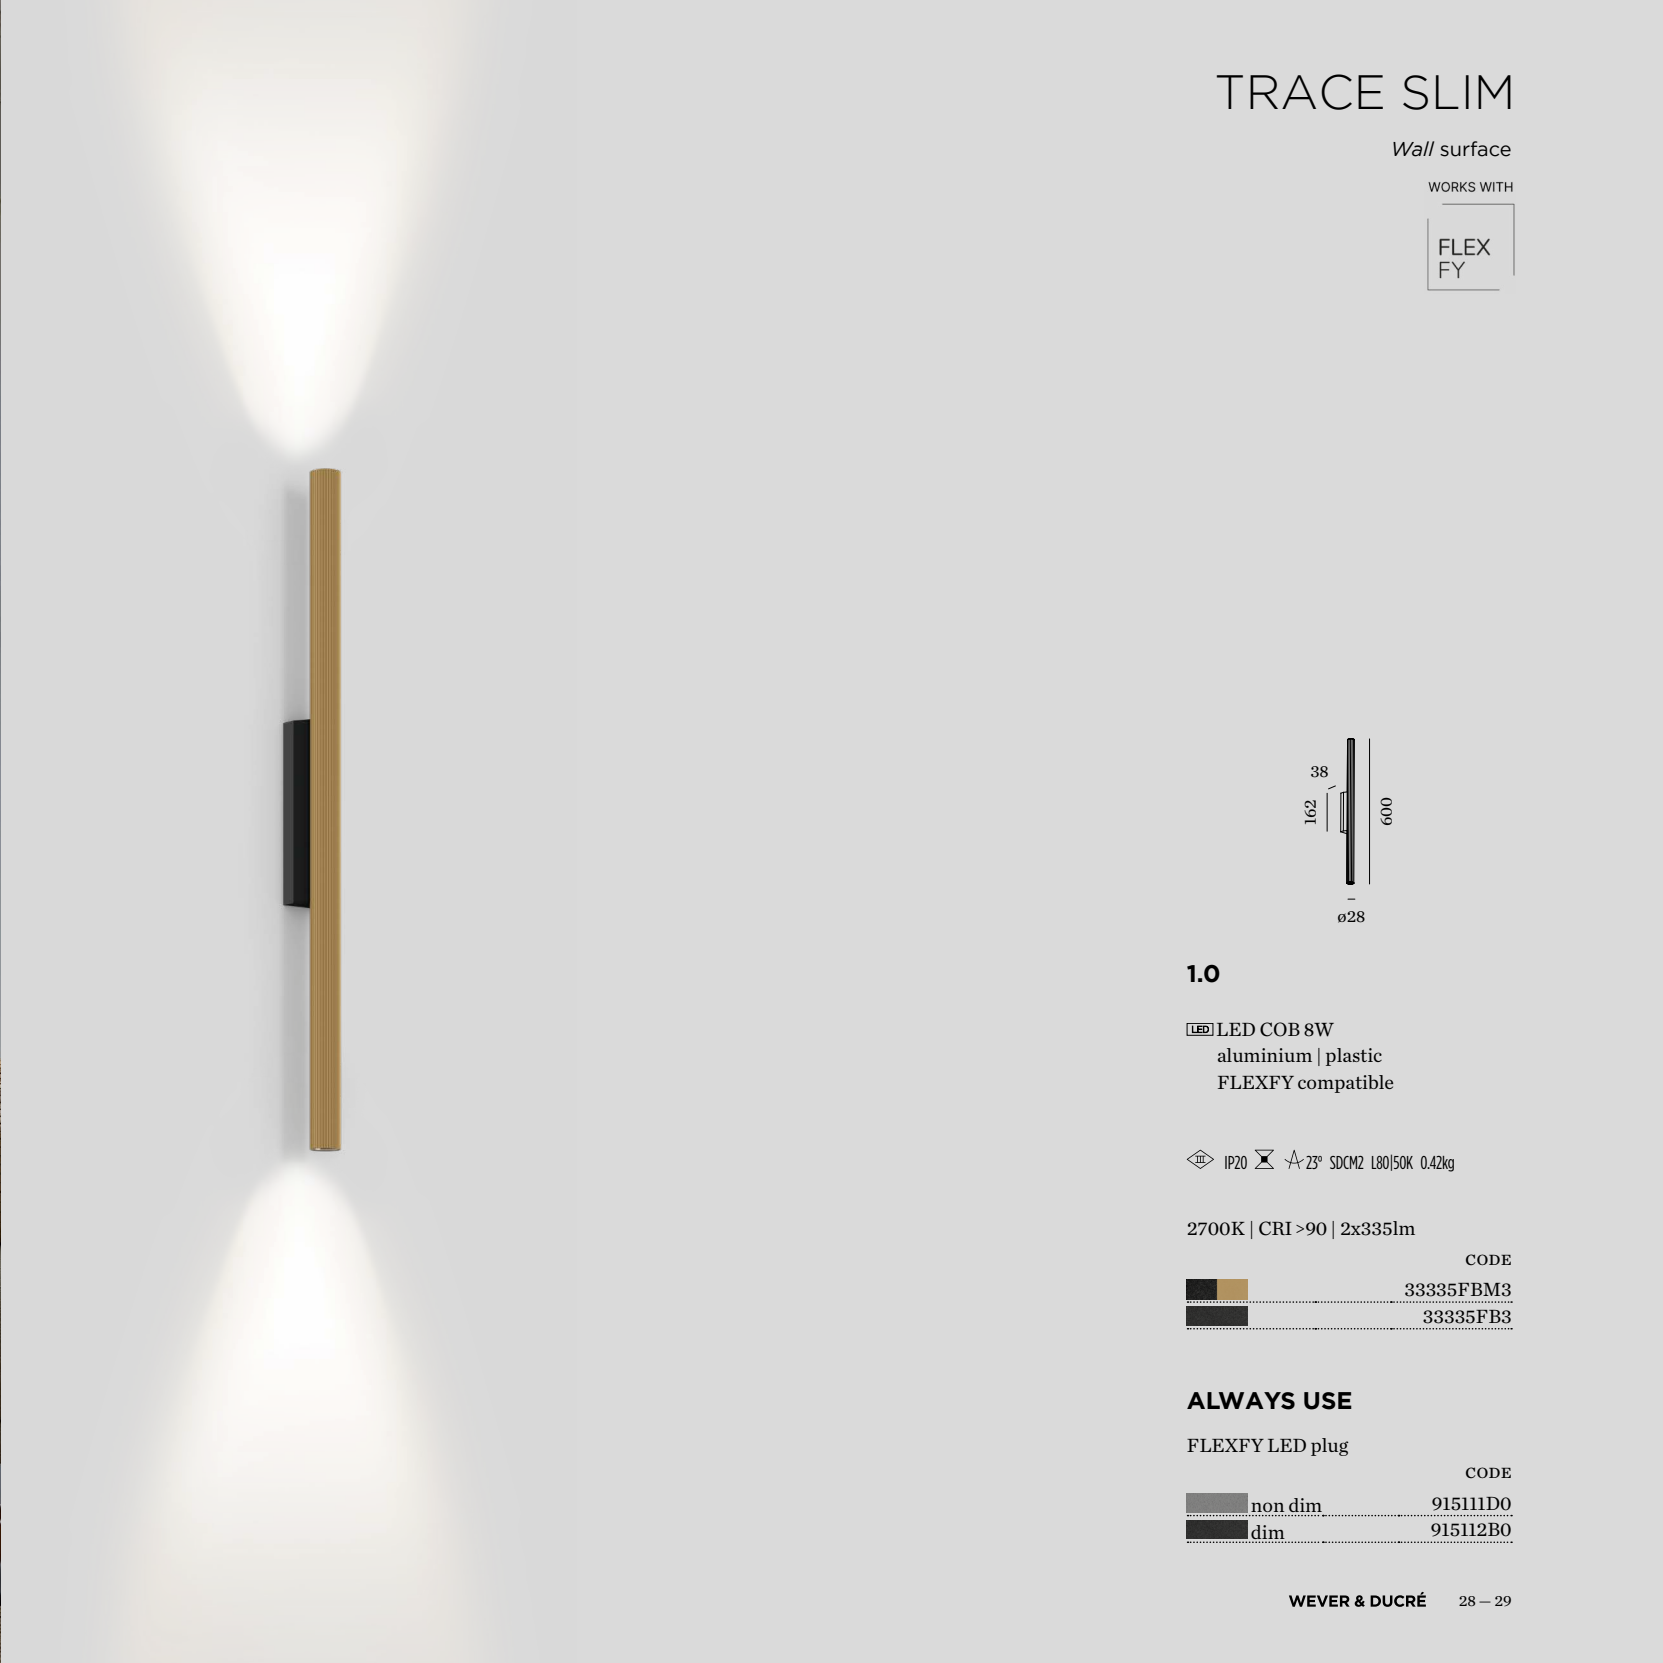


TRACE SLIM

Wall surface

WORKS WITH

FLEX
FY



1.0

LED COB 8W
aluminium | plastic
FLEXFY compatible

IP20 23° SDCM2 L80|50K 0.42kg

2700K | CRI >90 | 2x335lm

CODE	
	33335FBM3
	33335FB3

ALWAYS USE

FLEXFY LED plug

CODE	
 non dim	91511D0
 dim	915112B0





TAPIS SOFT

Wall surface

WORKS WITH

FLEX
FY

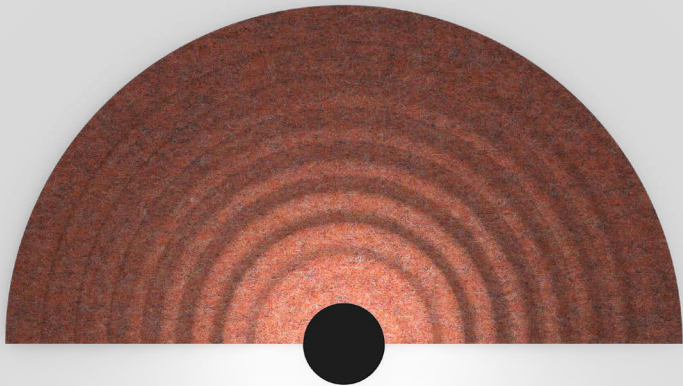

1.0

 LED PCB 8W
aluminium | PET felt material
FLEXFY compatible

 IP20 SDCM3 L80|50K 1.73kg


2700K | CRI >90 | 410lm

CODE	
	33617FWF3
	33617FMF3
	33617FLF3
	33617FOF3

ALWAYS USE

FLEXFY LED plug

CODE	
	non dim 915111D0
	dim 915112B0



2.0

 LED PCB 8W
aluminium | PET felt material
FLEXFY compatible

 IP20 SDCM3 L80|50K 0.94kg


2700K | CRI >90 | 440lm

CODE	
	33627FWF3
	33627FMF3
	33627FLF3
	33627FOF3

ALWAYS USE

FLEXFY LED plug

CODE	
	non dim 915111D0
	dim 915112B0



2.1

aluminium | PET felt material
FLEXFY compatible

0.64kg

CODE	
	33620FWF0
	33620FMF0
	33620FLF0
	33620FOF0






TAPIS SOFT

Wall surface

WORKS WITH

FLEX
FY



3.0

LED PCB 8W
aluminium | PET felt material
FLEXFY compatible

IP20 SDCM3 L80|50K 0.99kg


2700K | CRI >90 | 440lm

	CODE
	33637FWF3
	33637FMF3
	33637FLF3
	33637FOF3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0



4.0

LED PCB 8W
aluminium | PET felt material
FLEXFY compatible

IP20 SDCM3 L80|50K 0.99kg


2700K | CRI >90 | 440lm

	CODE
	33647FWF3
	33647FMF3
	33647FLF3
	33647FOF3

ALWAYS USE

FLEXFY LED plug

	CODE
non dim	915111D0
dim	915112B0




3.1

aluminium | PET felt material
FLEXFY compatible

0.69kg

	CODE
	33630FWF0
	33630FMF0
	33630FLF0
	33630FOF0



4.1

aluminium | PET felt material
FLEXFY compatible

0.69kg

	CODE
	33640FWF0
	33640FMF0
	33640FLF0
	33640FOF0

FLEXFY ACCESSORIES

WEVER&DUCRÉ ACCESSORIES FOR FLEXFY

GET IN CONTACT WITH FLEXFY
FLEXFY GmbH | Heinz-Friedrich-Straße 7
64380 Roßdorf | hello@flexfy.io

FLEXFY
REMOTE DRIVER
220-240VAC | 48V

350W
500W


FLEXFY
DIN RAIL DRIVER
220-240VAC | 48V

240W
480W

FLEXFY
CONNECTION CABLE

130mm

FLEXFY
WALL PLATE



L/H 600x2000mm

FLEXFY
LED PLUG
non dim | max. 14W | 48V | plastic
IP20 0.02kg CE



CODE
915111D0

FLEXFY
LED PLUG
wireless dim | max. 14W | 48V | plastic
IP20 0.02kg CE



CODE
915112B0

FLEXFY
DC POWER PLUG
50W | 48V | plastic
IP20 0.03kg



CODE
915121BD0

FLEXFY
DC POWER PLUG
100W | 48V | plastic
IP20 0.03kg




CODE
915122BW0

HONEYCOMB LOUVER
LECA | CENO




CODE
90051131

FLEXFY
USB CHARGER
48V | plastic
IP20 0.08kg




CODE
915131B0
915132B0

FLEXFY
CASAMBI GATEWAY
0.6W | 115mA | 5V | plastic
IP20 0.08kg



CODE
915141B0

FLEXFY
CASAMBI SWITCH
XPress wireless | 0.6W | 115mA | 5V
plastic
IP20 0.08kg



CODE
915151B0

CONTACT

Hello, can you *hear* me?

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 492 800
office@weverducre.com
weverducre.com

FLEXFY GmbH

Heinz-Friedrich-Straße 7
64380 Roßdorf
hello@flexfy.io

REPRESENTATIVE OFFICES

GERMANY

Europa-Allee 18
60327 Frankfurt am Main
Phone +49 69 210295 90
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B
51063 Cologne
Phone +49 221 130649 60
office.de@weverducre.com

Maybachstraße 10
70469 Stuttgart
Phone +49 711 806075 90
office.de@weverducre.com

1ST EDITION, APRIL 2025, ©WEVER & DUCRÉ* BV

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design as well as alterations or modifications to our products at any time. The details provided in this brochure were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at <https://www.weverducre.com/en/about-us/terms-conditions>.
Graphic Design: Carina Erlach, Carola Friedrich, Illustration: Carina Erlach, Text: Tanja Petschnig, Project Management: Victoria Prath, Carola Friedrich, Melanie Löffler
Photography: p.7 Niklas Korndörferp, p.12 Thomas De bruynep, p. 20 Kris Dekeijser, p.26 Kris Dekeijser